

Data sheet

DUO fleet

Model: socket, calibration law-compliant, Service RCD

Article no. 12239630

DUO fleet SAM thinks bigger – more charging points, less grid expansion and careful use of resources. With Compleo's Power Rail technology, charging stations are connected in daisy chain in a cost-efficient manner, saving 30% or more in installation costs.

This professional charging solution is ideal for public charging points and networked operation in companies, as it complies with calibration regulations thanks to SAM technology and meets AFIR requirements – including ISO 15118-2. The bright 4.3" display allows secure QR codes for direct payment to be shown. Alternatively, charging processes can be activated via RFID card or app.

The DUO fleet SAM features a durable housing that will never rust. As an all-in-one charging station, all components are already integrated in the DUO fleet SAM. It comes with an automatically resettable service RCD as standard. It has two Type 2 sockets and offers fast charging with up to 22 kW (AC) at each charging point.



Highlights

- Charging with up to 2x 22 kW AC
- 30% or more savings on installation costs thanks to Power Rail technology
- Includes Ethernet switch with four free ports
- AFIR-compliant, and ISO 15118 hardware ready
- High cybersecurity according to RED
- Calibration law-compliant billing via SAM storage and display module
- Convenient single-hand operation
- All protective components integrated
- Increased protection from vandalism due to highly impact resistant fibreglass reinforced plastic enclosure (IK10 rating, incl. display)
- Frontaccess point for connection and servicing
- Connection to IT backends via: OCPP 1.6J
- Energy/load management: Modbus protocol
- RCD self-test functionality
- RCD resetable with sliding cover
- LAN and 4G connectivity

Accessories

- SMC base + base filler granulate
- Installation kit
For installation without prefabricated base

Technical data

General

Charging mode	AC, mode 3
Number of charging points	2
Charging connector	2x type 2 socket, incl. sliding cover
IT backend connection	OCPP 1.6 JSON
Authorisation	Free charging, RFID, smartphone app, optional: Giro-e
Package dimensions (H x W x D)	1,650 x 800 x 1,200 mm, up to six charging stations on one Euro pallet

Mechanical details

Mounting type	Base mounted (bm)
Enclosure material	Sheet moulding compound (SMC)
Surface	Painting: enclosure RAL 7016, textured paint
Lock	Swivelling lever, built-in space for one profile half cylinder
Dimensions (H x W x D)	1,441 x 400 x 225 mm
Weight	Approx. 38 kg

Electrical data

Maximum charging output per charge point	22 kW: Type 2 socket
Nominal voltage, number of phases, nominal frequency	400 V; 3; 50 Hz
Maximum input current	63 A per phase, configurable
Maximum output current	32 A
Device power consumption in standby mode	< 13 W
Connections	Integrated busbar system (Power-rail technology)
Earthing system	TN, TT
Protection	2x RCD type A; 2x DC residual current detection 6 mA; 2x circuit breaker C20 3P or C40 3P; 1x circuit breaker B16 1P
Overvoltage protection	Type 1+2+3 compliant with DIN EN 61643-11
Protection class	2
Welding detection	2x hardware-based redundant cut-off
Measurement accuracy	Class A (DIN EN 50470)
Power factor $\cos\phi$	0,90 - 1
Calibration law	The measurement accuracy of this meter is guaranteed only from a minimum output energy quantity of 1 kWh

Technical data

Connectivity

Communication interface to IT backends	LAN, mobile data network (2G/4G)
Protocols for communication with IT backends	OCPP 1.6 JSON
Protocols for communication with third-party devices	Modbus TCP/IP
Communication interface EV and EVSE	ISO 15118-2 according to AFIR
Update capability	LAN, mobile data
Status display	LED status indicator for each charge point
Display	Size: 4.3" display

Certification

IP protection class	Enclosure: IP44; relevant components: IP54
Impact resistance	IK10
Meter / German calibration law	2x MID-compliant smart meter with SAM storage and display module
Approvals	CE, RoHS, REACH, GPSD, WEEE
Standards	DIN EN 61851-1; DIN IEC/TS 61439-7; ISO 15118-2


Environmental conditions

Storage temperature	-25 °C to +50 °C
Environmental operating temperature	-25 °C to +40 °C
Humidity	< 95 % (non-condensing)
Degree of pollution	3
Areas of use	Internal & external areas
Operating altitude above sea level	2,000 m max.

Measurements



Illustrations/model variants

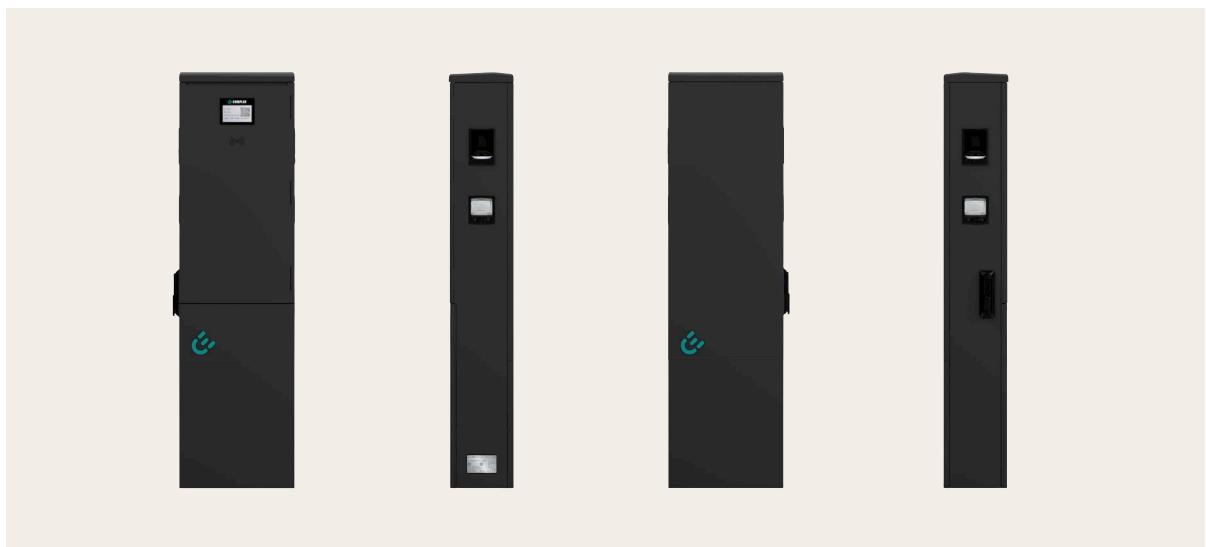



Compleo Charging Solutions GmbH & Co. KG

Ezzestraße 8
44379 Dortmund
Germany

info@compleo-cs.com
compleo-charging.com

Technical changes and errors excepted.

©2025 Compleo. All rights reserved.

This document may not be copied or reproduced in any form or by any means, in whole or in part, without written permission. All illustrations in this document serve only as examples and may differ from the delivered product. All information in this document is subject to change without notice and does not represent a commitment on the part of the manufacturer.

The power to move